

INSTALL INSTRUCTIONS

SOUNDPLY® RF PANEL CEILING LAY-IN



FIELD MODIFICATIONS

For edgebanding and field modifications please see Install Instructions: *SoundPly Panel Modifications*.

CEILING PREPARATION

Ensure all wet work such as taping and painting, etc is complete and ensure that the T-Grid is secure, level and square per manufacturer's instructions, Cisca guidelines and local codes.


NOTE: Suspension system should be USG heavy duty 15/16" T-Grid 1 1/2" tall with 1/4" rectangular bulb, or equivalent.

INSTALLATION


If panels are sequence matched, location label is located on the back and the panel must be installed according to the shop drawings included in the panel shipment. If shop drawings cannot be located, please contact Navy Island for a copy before cutting or installing.

- A. Lift panel above grid and gently lower into place.

SoundPly Lay-In

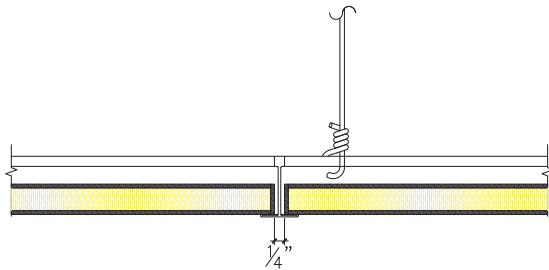

SoundPly Lay-In Tegular edge with shim

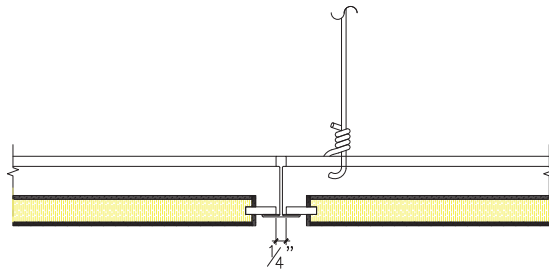

DISCLAIMER

Navy Island, Inc. is not responsible for the appearance or performance of SoundPly panels that are not installed or modified in accordance with these written instructions and/or project shop drawings. See SoundPly Limited Warranty for more details.